
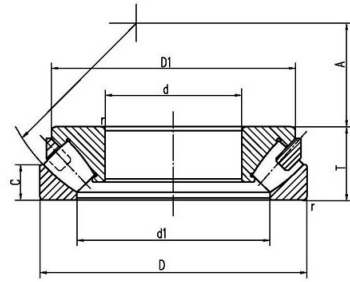


Thrust Spherical Roller Bearings



Bearing NO.		Boundary dimensions(mm)									Basic load ratings(kN)		Limiting speed(rpm)		Abutment and fillet dimensions(mm)			Weight (kg)
New	Old	d	D	H	r 1.2min	d1	D1	B	C	S	Cr	Cor	Grease	Oil	da min	Da max	ra max	Refer
29320	9039320	100	170	42	1.5	152	128	26.2	20.8	58	410	1280	1500	2000	130	150	1.5	3.91
29420	9039420	100	210	67	3	185	144	43	33	62	840	2400	1100	1600	150	175	2.5	10.5
29322	9039322	110	190	48	2	175	143	16	23	64	530	1710	1300	1800	145	165	2	6.94
29422	9039422	110	230	73	3	208	155.5	26	34.4	69	1010	2930	950	1400	165	190	2.5	18.1
29324	9039324	120	210	54	2.1	187.5	156.5	34	27	70	645	2100	1100	1600	160	180	2	7.3
29424	9039424	120	250	78	4	222	172	50.5	37	74	1160	3400	900	1300	180	205	3	17.1
29326	9039326	130	225	58	2.1	200	166	36.5	28	76	740	2450	1000	1500	170	195	2	8.48
29426	9039426	130	270	85	4	246	183	31	39.7	81	1330	3900	850	1200	195	225	3	28.3
29328	9039328	140	240	60	2.1	216.5	179	38.5	30	82	840	2810	950	1400	185	205	2	10.4
29428	9039428	140	280	85	4	244.5	195.5	54	42	86	1370	4200	850	1200	205	235	3	22.2
29230	9039230	150	215	39	1.5		177				351	1560		1800				4.6
29330	9039330	150	250	60	2.1	240	194	20	29	87	870	2900	950	1400	195	215	2	11.5
29430	9039430	150	300	90	4	266	206	58	44	92	1580	4900	800	1100	220	250	3	27.9
29232	9039232	160	225	39	1.5		188				362	1650		1700				4.8
29332	9039332	160	270	67	3	243	203	42	33	92	1010	3400	850	1200	210	235	2.5	14.3
29432	9039432	160	320	95	5	285	218.5	34	46.9	99	1740	5400	750	1000	230	265	4	32.8
29234	9039234	170	240	42	1.5		201				408	1900		1600				6
29334	9039334	170	280	67	3	260.3	216	43.5	31.7	96	1050	3500	850	1200	220	245	2.5	15.7
29434	9039434	170	340	103	5	302	235	65.5	50	104	1680	5800	700	950	245	285	4	39.7
29236	9039236	180	250	42	1.5	239	209	15	21.3	97	420	2010	900	1600	215	227	1.5	7.05
29336	9039336	180	300	73	3	275	229	25	34.4	103	1230	4200	800	1100	235	260	2.5	19.9
29436	9039436	180	360	109	5	326	249.5	39	51.2	110	1870	6500	670	900	265	304	4	64.2
29238	9039238	190	270	48	2	255	226		25.5	103	518	2200		1400	225	243	2	8.7
29338	9039338	190	320	78	4	288.5	244	49	38	110	1370	4700	750	1000	250	275	3	23
29438	9039438	190	380	115	5	345	263	41	53.7	117	2100	7450	630	850	275	320	4	75.6
29240	9039240	200	280	48	2	266	236	15	24	108	540	2310		1400	235	255	2	8.5
29340	9039340	200	340	85	4	306.5	257	53.5	41	116	1570	5450	700	950	265	295	3	28.5
29440	9039440	200	400	122	5	360	267.5	44	56.7	122	2290	8150	600	800	290	335	4	83.5
29244	9039244	220	300	48	6	285	254	15	24	117	560	2500		1300	260	275	5	9.2
29344	9039344	220	360	85	6	330	277.5	29	40.7	125	1340	5200	700	950	285	315	5	28.6